


SiLine® GF M RP Basic



SiLine® GF M RP Basic

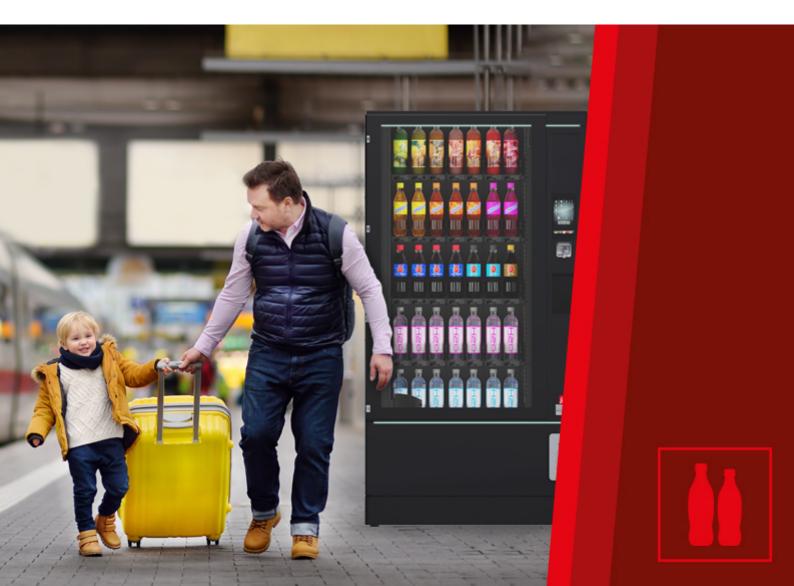

General information

- Vending of glass bottles, PET bottles and cans from 0.2 l to 0.6 l
- 12 mm thick anti-vandalism panel made from polycarbonate
- Reinforced locking lever protection, the corrugated profile prevents forced opening or burglary
- Coin insert slide and coin return drum
- Insulating glass panel VSG from ESG
- 🛮 All-round door split cover



Overview

Dimensions with door split cover:

Dimensions with anti-theft protection frame and

side lock: Weight:

Weight with anti-theft protection frame and side

lock:

Electrical connection values:

Power consumption:

Anti-vandalism panel:

1,839 x 999 x 904 mm (height x width x depth)*

1,850 x 1,055 x 904 mm (height x width x depth)*

approx. 370 kg (in standard version)

approx. 380 kg

220 - 230 V / 50 Hz / min. 10 A

400 - 750 W (varies depending on the type of chiller unit)

Standard 12 mm PC

Optional 8 mm theft prot. anti-vandalism panel

*Deviations in the housing dimensions are possible due to add-on parts and accessories.

Design variants

Design panel

SiLine® GF M RP Basic



- Design VA = Lower design panel made from Stainless
- Design RA = Lower design panel RAL painted

Cabinet colours

- Pure white (RAL 9010)
- White aluminum (RAL 9006)
- Jet black (RAL 9005)

Optional:

The standard design VA can be added with the design package A. Design RA can be complemented with Design package A.

Design package A includes:

■ LED-Decoration strips above and below the glass panel

All design variants can be found in the brochure.

Options and accessories

- 8 mm thick vandal-proof panel
- Anti-theft prot. frame with side lock and CES mortise lock (optional KESO)
- Heater ('Frost monitoring function'): The internal temperature is held above 0 °C)
- Laminated safety glass panel with UV filter



Sielaff GmbH & Co. KG Automatenbau Herrieden Münchener Str. 20 91567 Herrieden Germany

Phone: +49 9825 18-0 Telefax: +49 9825 18-311155

info@sielaff.de www.sielaff.com See here for our company profile video



